

LED TRIPROOF LIGHT



Slimline Series




LED Tri-proof Light **Slimline Series**

Features

- Aluminum alloy body & fire retardant polycarbonate cover
- Unique construction with slim & stylish design
- High luminous flux SMD LED with LM80 report
- Overall luminous efficacy from 110-130LPW
- Non-flicker LED driver with UL/TUV/SAA/CE certified
- Surface mount & suspended installation optional
- Up to 70% energy saving with zero maintenance cost
- Dimmable / Microwave Sensor / Emergency available

Microwave Motion Sensor

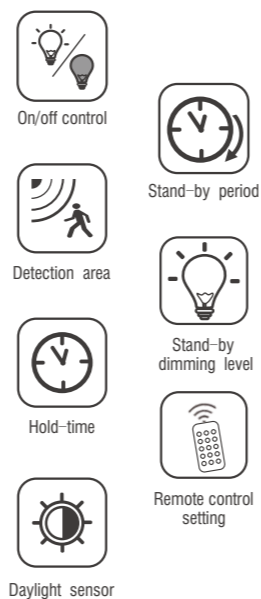

Specifications



Item No.	Wattage (W)	Voltage (V)	Luminous Flux	CCT (K)	CRI (Ra)	Beam Angle	PF	Dimensions (mm)	IP
SO-TPL-06S20W	20W	AC100-240V	2600lm	2700-6500K	>80	120°	>0.9	L600xW84xH46	IP65
SO-TPL-09S30W	30W	AC100-240V	3900lm	2700-6500K	>80	120°	>0.9	L900xW84xH46	IP65
SO-TPL-12S40W	40W	AC100-240V	5200lm	2700-6500K	>80	120°	>0.9	L1200xW84xH46	IP65
SO-TPL-15S50W	60W	AC100-240V	6500lm	2700-6500K	>80	120°	>0.9	L1500xW84xH46	IP65
SO-TPL-18S50W	70W	AC100-240V	9100lm	2700-6500K	>80	120°	>0.9	L1800xW84xH46	IP65

