

LED Linear High Bay Light Apollo Series

- LED Linear High Bay & Low Bay Light for industrial application
- 6063 extruded aluminum alloy with superior heat dissipation
- Lumileds/Samsung/ Epistar SMD LED, LM80, 50000hrs
- Overall luminous efficacy up to 130LPW / 150LPW
- Installation: Suspension / Surface mount / Rotating mount
- IP65 & IK10 for wet & damp locations
- 0-10V, PWM, DALI dimming options / Emergency available
- For Warehouses, Gyms, Super Markets, Public Places.

Specifications



Electrical Parameters


Wattage	80W / 100W / 150W / 200W
Input voltage	AC100-277V 50/60Hz
Driver Brand	CE Driver / Meanwell
PF	>0.9
THD	<15%

Photometric Parameters

LED Type	SMD
LED Brand	Lumileds/Samsung/ Epistar
CRI	>80
CCT	3000K/4000K/5000K/6000K
Beam Angle	120°
Luminous Efficacy	130LM/W (150LM/W available)

Physical Parameters

Housing	Extruded Aluminum Alloy / Silver Finishing
Cover	Frosted or Stripped PC
Installation	Suspension / Surface mount / Rotating mount
IP Rating	IP65
Certification	CE, ROHS
Working Temp.	-20~+45°C
Storing Temp.	-40~+60°C
Warranty	3 Years for CE Driver / 5 Years for Meanwell

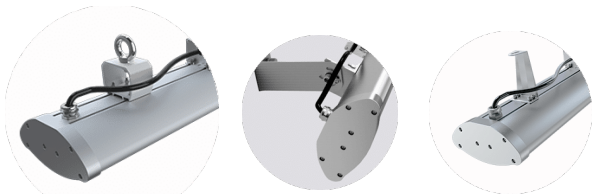

Suspension **Rotating mount** **Surface mount**

Model	Wattage	Lumen	Dimension (mm)	Weight
SO-HBL-A600-80W	80W	10400lm	L600*W132*H55mm	1.5kg
SO-HBL-A900-100W	100W	13000lm	L900*W132*H55mm	2.5kg
SO-HBL-A1200-100W	100W	13000lm	L1200*W132*H55mm	3.5kg
SO-HBL-A1200-150W	150W	19500lm	L1200*W132*H55mm	3.5kg
SO-HBL-A1500-150W	150W	19500lm	L1500*W132*H55mm	4.5kg
SO-HBL-A1500-200W	200W	26000lm	L1500*W132*H55mm	4.5kg

60degree beam angle available

