


## LED Linear High Bay Light Series

- LED Linear High Bay & Low Bay Light for industrial application
- 6063 extruded aluminum alloy with superior heat dissipation
- Lumileds/Samsung/ Epistar SMD LED, LM80, 50000hrs
- Overall luminous efficacy up to 130LPW / 150LPW
- Various light distribution angles available for more applications
- Installation: Suspension / Surface mount (100° adjustable)
- IP65 & IK10 for wet & damp locations
- 0-10V, PWM, DALI dimming options / Emergency available



### Specifications

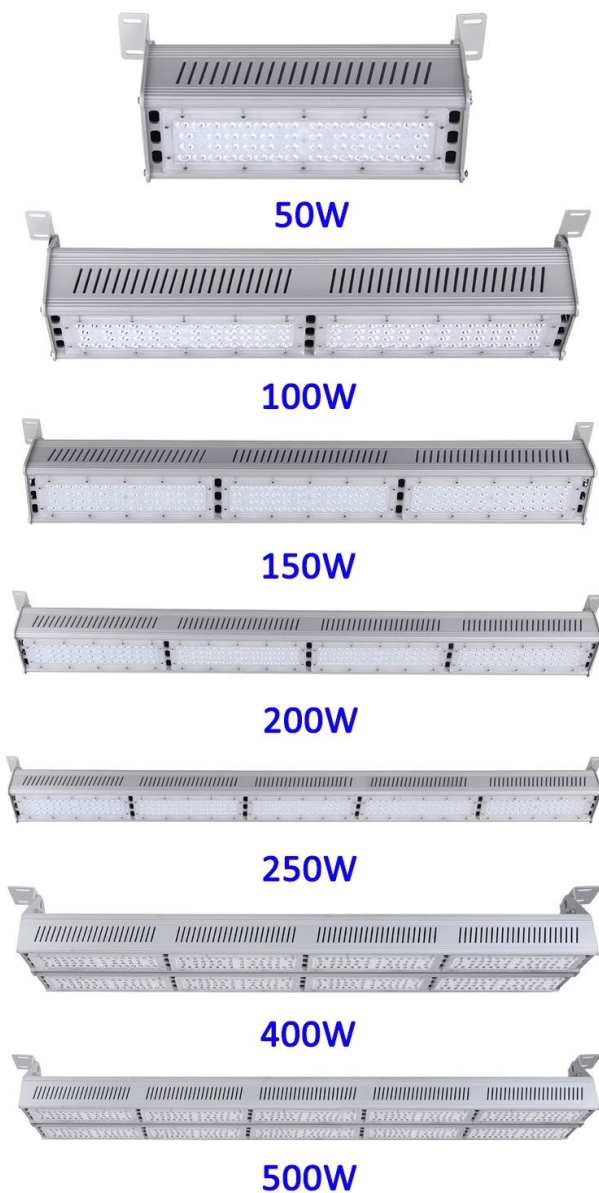

#### Electrical Parameters

Wattage	50W / 100W / 150W / 200W / 250W / 300W / 400W / 500W
Input voltage	AC100-277V 50/60Hz
Driver Brand	CE Driver / Meanwell
PF	>0.9
THD	<15%

#### Photometric Parameters

LED Type	SMD
LED Brand	Lumileds/Samsung/ Epistar
CRI	>80
CCT	3000K/4000K/5000K/6000K
Beam Angle	30°/60°/90°/60x120°/60x90°/30x70°/155x80°
Luminous Efficacy	130LM/W (150LM/W available)

#### Physical Parameters

Housing	Extruded Aluminum Alloy / Silver or Black Finishing
Cover	PMMA lens
Installation	Suspension / Surface mount (100° adjustable)
IP Rating	IP65
Certification	CE, ROHS
Working Temp.	-20~+45°C
Storing Temp.	-40~+60°C
Warranty	3 Years for CE Driver / 5 Years for Meanwell

Model	Wattage	Lumen	Dimension (mm)	Weight
SO-HBL-M01-50W	50W	6500lm	L353*W115*H114mm	2.0kg
SO-HBL-M02-100W	100W	13000lm	L620*W115*H114mm	3.0kg
SO-HBL-M03-150W	150W	19500lm	L887*W115*H114mm	4.1kg
SO-HBL-M04-200W	200W	19500lm	L1154*W115*H114mm	5.2kg
SO-HBL-M05-250W	250W	26000lm	L1421*W115*H114mm	6.2kg
SO-HBL-M06-300W	300W	39000lm	L947*W230*H173mm	8.1kg
SO-HBL-M08-400W	400W	52000lm	L1214*W230*H173mm	11.2kg
SO-HBL-M10-500W	500W	65000lm	L1481*W230*H173mm	13.0kg